



# KOOTENAY FILTER™

Kootenay Filter

 [kootenayfilter.com/product/kfi-1250-without-flange/](http://kootenayfilter.com/product/kfi-1250-without-flange/)


**KFI 1250**

RECOMMENDED FLANGES			PRE-FILTER INSTALLED
8" Wide / 10" / 12" / 14"			Replacement Pre-Filter PF1250
AIR FLOW	CFM	M <sup>3</sup>	Diameter 40 cm / 15.8" Length 125 cm / 49.2" Carbon Weight 41 Kg / 90.4 lbs. Total Weight 58 Kg / 127.6 lbs. Carbon Bed Depth 6.5 cm / 2.55" Carbon Type Pelletized
Max. Exhaust	1020	1700	
Scrubbing Max. Recirculating	2040	3400	

STANDARD LINE INDUSTRIAL CARBON FILTERS 4" to 16" / 206 - 1260 CFM  
STANDARD LINE FILTERS USE PELLETTIZED ACTIVATED CARBON - VERY LOW PRESSURE DROP  
PROVEN DESIGN WITH 100% ACTIVATED CARBON - LONG SERVICE LIFE  
MACHINE PACKED FOR CONSISTENT QUALITY - SCREENED CARBON

PLEASE RECYCLE

**AIR FILTRATION & VENTILATION**  
[kootenayfilter.com](http://kootenayfilter.com)

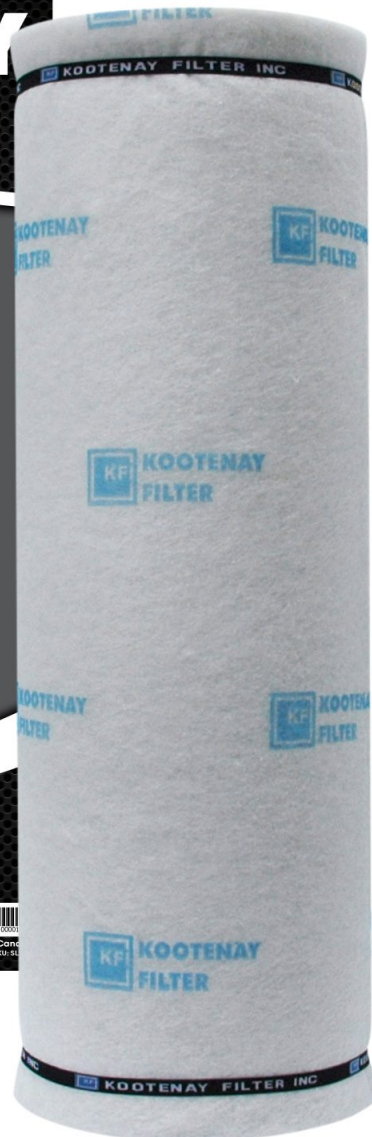

KFI 1250 Without Flange

Carbon: Pelletized Activated Carbon CKV-4

Prefilter installed: Yes

Replacement Prefilter SKU: PF1250

**CFM/M3 Ratings:**

Max Exhaust CFM – 1020

Max Recirculate CFM – 2040

Max Exhaust M3 – 1700

Max Recirculating M3 – 3400

SKU: SL1250 Category: [Standard Line Filters](#)

**Description**

---

<b>SKU:</b>	<b>SL1250</b>	
Carbon:	Pelletized Activated Carbon CKV-4	
Flanges Available:	8"Wide / 10"/ 12"/ 14"	SKU: FL8W / FL10 / FL12 / FL14
Prefilter Installed:	Yes	
Replacement Prefilter SKU:	PF1250	
Measurements and Weights:	Imperial	Metric
Outside Diameter:	15.8"	40cm
Lengths:	49.2	125cm
Total Weight:	127.6lbs	58kg
Carbon Weight:	90.4lbs	41kg
Carbon Bed:	2.55"	6.5cm
Max Operating Temperature:	176F	80°C
Minimum Recommended Airflow:	630CFM	
Pressure Drop at Max CFM:	180pa / 0.75"wg	

---

**SKU:** SL1250

---

<b>Possible Fan Combinations:</b>	<b>Exhaust</b>	<b>Recirculating</b>
	<u>Renegade FR 8</u> <u>Renegade FR 10</u>	<u>Renegade EC Pro 8</u> <u>Renegade EC Pro 10</u> <u>Renegade EC Pro 14</u> <u>Renegade Silent 8</u> <u>Renegade Silent 10</u>

---

## Standard Line Filters - Details

---

KFI Standard Line filters are made with virgin activated CKV-4 carbon. Each filter is hand made in North America using a proven filing process making this product one of the best filters on the market. At KFI we take pride in our products and ensure our customers receive the highest quality products available.

- Virgin activated, pelletized CKV-4 Carbon
- Dedusted and screened
- Low pressure drop rated @0.1 sec. contact time
- Long service life
- Max operating temperature 80°C / 176°F
- Max allowed humidity 70% (short term only)
- Prefilter installed
- Robust galvanized steel housing
- Single packaged and sealed for storage
- Made in North America
- 2.55" carbon bed
- KFI flanges sold separately, available in 4" to 16"