


DOUBLE ENDED LAMP INSTALLATION




STEP 1 :

Put on gloves, do not touch lamp with bare hands. The outer jacket is made of quartz glass and cannot be touched. Touching the glass weakens it and can cause lamp failure over time.

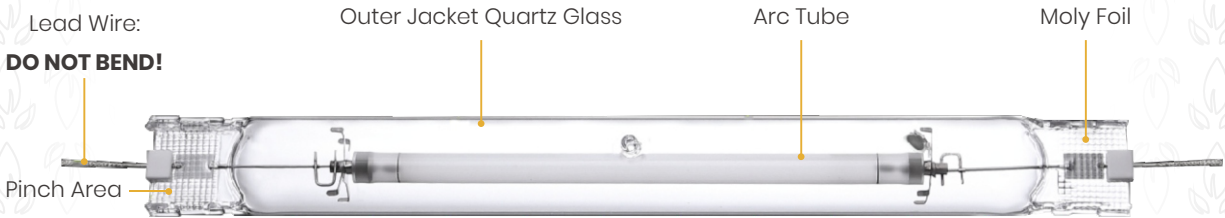

STEP 2 :

Install the lamp by positioning the "Pinch Area" horizontally (NOT vertically) while inserting the "Lead Wires" between the slots in each socket.

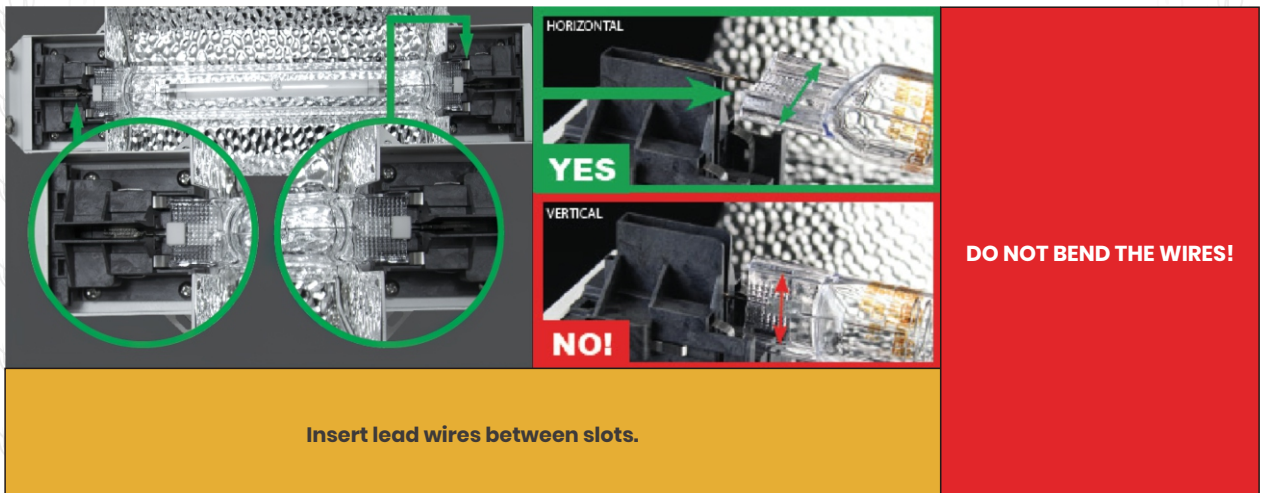

DOUBLE ENDED LAMP INSTALLATION

STEP 3 :

Gently push outward the “Pinch Area” to the silver socket springs until it is securely in place.


CAUTION: Do not push too hard as you may break or chip the glass which can cause lamp failure.



STEP 4 :

Very forcefully slide each socket inward, all the way, until it clicks into place – making sure it is fully closed with no gap visible.

CAUTION: Failure to completely close and lock sockets in place can cause arcing in the socket and fire Damage.

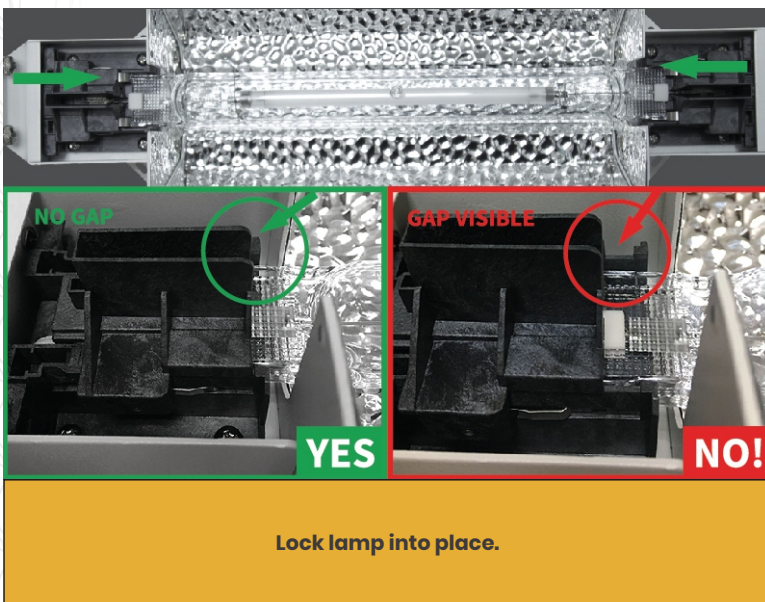

NOTIFICATION :

1: DO NOT test fixture without lamp installed.

2: The lamp cord between reflector and ballast should NOT be extended.

3: Double check the sockets locking position by flashlight is strongly recommended .

