


## PVC True Union Spring Check Valve

- Size(s): 1/2-Inch, 3/4-Inch, 1-Inch, 1-1/4-Inch, 1-1/2-Inch, 2-Inch
- Color(s): White, Gray
- End Connection(s): Socket x Socket and Thread x Thread included
- Schedule: 40
- Working Pressure: 150 PSI @ 73° F
- Functionality: Fully replaceable component parts
- Material Body: Virgin PVC
- Material O-Ring: EPDM

PVC True Union Ball Check Valves are yet another durable, Schedule 40, premium check valve to prevent back-flow in water and fluid handling systems. Using state of the art injection molding machines and a comprehensive manufacturing process, Aquagation offers a full line ranging in sizes from 1/2-Inch through 2-Inch, white and gray, both socket x socket and thread x thread. Great for high stress environments where the durability of flapper and spring check valves is insufficient. PVC True Union Ball Check Valves are of the highest quality and functionality, surpassing peers in several key metrics.

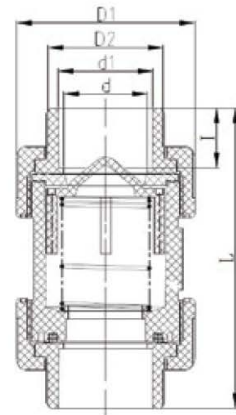

### TRUE UNION SPRING CHECK VALVE

Nom Size	NPT Thd./in	BSPT Thd./in	d	JIS d1	BS d1	ANSI d1	DIN d1	Dimensions				
								D1	D2	I	L	
15mm(1/2")	14	14	16.8	22	22	21.34	20	48	27.4	17	87.2	
20mm(3/4")	14	14	22	26	26	26.67	25	68	36.2	19.7	114.53	
25mm(1")	11.5	11	26.5	32	34	33.4	32	68	42	23	129.5	
32mm(1-1/4")	11.5	11	37.1	38	42	42.16	40	95	52.6	27	151.1	
40mm(1-1/2")	11.5	11	44.6	48	48	48.26	50	92.8	61.4	32	160.3	
50mm(2")	11.5	11	54.8	60	60	60.33	63	114.8	77.6	38	193.2	
65mm(2-1/2")	8	11	65	76	76	73	75	148	89.4	45	231.4	
80mm(3")	8	11	80	89	89	88.9	90	179	108.5	58	270	
100mm(4")	8	11	80	114	114	114.3	110	179	132.5	63.5	281.8	